


THIS DRAWING AND THE INFORMATION DISCLOSED HEREIN ARE PROPRIETARY DATA OF INTERCONNECT SOLUTIONS INC. AND IS TO BE USED FOR REFERENCE ONLY. REPRODUCTION OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS PROHIBITED WITHOUT THE EXPRESSED WRITTEN APPROVAL OF ISI.


REVISIONS

REV	DESCRIPTION	DATE	APPD
	CUSTOMER DRAWING		

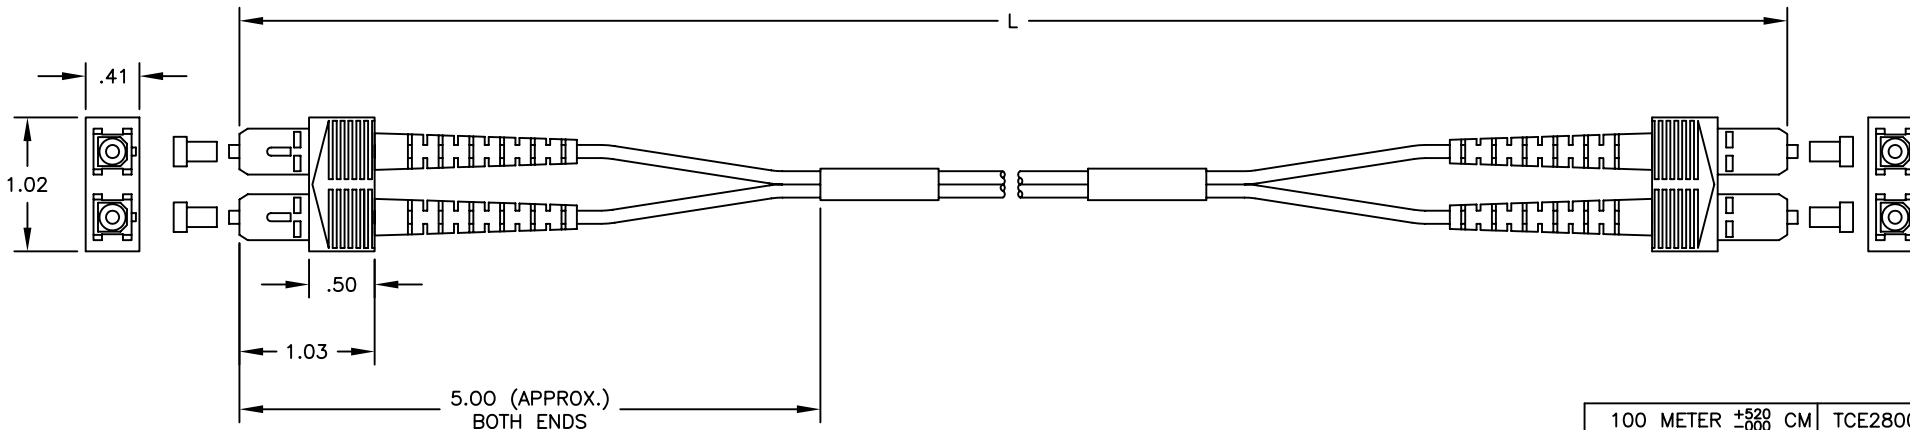

100 METER	$\begin{smallmatrix} +520 \\ -300 \end{smallmatrix}$ CM	TCE280001M0100M
75 METER	$\begin{smallmatrix} +380 \\ -300 \end{smallmatrix}$ CM	TCE280001M0075M
50 METER	$\begin{smallmatrix} +280 \\ -300 \end{smallmatrix}$ CM	TCE280001M0050M
25 METER	$\begin{smallmatrix} +130 \\ -300 \end{smallmatrix}$ CM	TCE280001M0025M
20 METER	$\begin{smallmatrix} +120 \\ -300 \end{smallmatrix}$ CM	TCE280001M0020M
15 METER	$\begin{smallmatrix} +90 \\ -300 \end{smallmatrix}$ CM	TCE280001M0015M
10 METER	$\begin{smallmatrix} +60 \\ -300 \end{smallmatrix}$ CM	TCE280001M0010M
5 METER	$\begin{smallmatrix} +10 \\ -300 \end{smallmatrix}$ CM	TCE280001M0005M
3 METER	$\begin{smallmatrix} +6 \\ -300 \end{smallmatrix}$ CM	TCE280001M0003M
1 METER	$\begin{smallmatrix} +2 \\ -300 \end{smallmatrix}$ CM	TCE280001M0001M
DIM "L"		PART NUMBER

7. ADDITIONAL LENGTHS AVAILABLE.
6. INDIVIDUALLY BAGGED AND MARKED WITH INSERTION LOSS VALUES.
5. ASSEMBLY PROCEDURE: GLUE AND POLISH
4. FERRULE MATERIAL: FULL CERAMIC ZIRCONIA
3. MAXIMUM INSERTION LOSS: 0.30 db (0.15 TYPICAL)
2. MULTIMODE FIBER: 62.5/125 μ m
1. UL TYPE ONFR (RISER GRADE) 3.0 MM DIAMETER ZIPCORD.

DWN	H. SETH 2/21/2002	 INTERCONNECT SOLUTIONS INC. 17191 Armstrong Ave. Phone (949) 261-0990 Irvine, CA 92614 Fax (949) 261-0555	
CHK			
APVD			
TITLE		CABLE ASSEMBLY, DUPLEX 62.5/125 μ m FIBER OPTIC, SC TO SC	
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES		SIZE	NUMBER
DECIMALS FRACTIONS $\pm 1/64$		B	TCE280001MXXXXM
X $\pm .100$ ANGLES $\pm 1/2^\circ$		SCALE NONE	SHEET 1 of 1
XX $\pm .010$			
XXX $\pm .005$			